


50/60HZ PCB MOUNT TRANSFORMERS - EE RANGE

0.35W EE20-10 PE20 SERIES



FEATURES:

It is miniaturised to be easily PCB mounted.
 It has very high insulation of 4000Vrms Hi-pot.
 It accords with UL94V-0 flammability req Ulrements.
 Heat-resistance reaches 130

OPTIONS:

Packaging unit: 50 pieces
 Bulk packaging is standard
 Custom design available

COMMON APPLICATIONS:

Medical eq Ulpments
 Industrial eq Ulpments
 Industrial controls
 Test eq Ulpment
 Industrial computers
 Avionics & telecom


ELECTRICAL CHARACTERISTICS (@ 25)

MSN: bruce_fu-vip@hotmail.com

Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.	Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.
PE201011	230	6 / 83.0	8.90	1	PE201013	115	6 / 83.0	8.90	1
PE201012	230	9 / 55.0	13.50	1	PE201014	115	9 / 55.0	13.50	1
PE201013	230	12 / 42.0	19.40	1	PE201015	115	12 / 42.0	19.40	1
PE201014	230	15 / 34.0	24.60	1	PE201016	115	15 / 34.0	24.60	1
PE201015	230	18 / 28.0	29.50	1	PE201017	115	18 / 28.0	29.50	1
PE201016	230	24 / 21.0	39.60	1	PE201018	115	24 / 21.0	39.60	1
PE201017	230	2 6 / 42.0	2 9.60	2	PE201019	115	2 6 / 42.0	2 9.60	2
PE201018	230	2 9 / 28.0	2 15.20	2	PE201010	115	2 9 / 28.0	2 15.20	2
PE201019	230	2 12 / 21.0	2 19.10	2	PE201011	115	2 12 / 21.0	2 19.10	2
PE201010	230	2 15 / 16.0	2 23.30	2	PE201012	115	2 15 / 16.0	2 23.30	2
PE201011	230	2 18 / 14.0	2 29.20	2	PE201013	115	2 18 / 14.0	2 29.20	2
PE201012	230	2 24 / 10.0	2 38.80	2	PE201014	115	2 24 / 10.0	2 38.80	2

Frequency 50/60Hz Potted under vacuum
 Split-bobbin Temperature class to 70 /B
 Short-circuit-proof weight: 0.035kg

PHYSICAL CHARACTERISTICS TECHNICAL INFORMATION

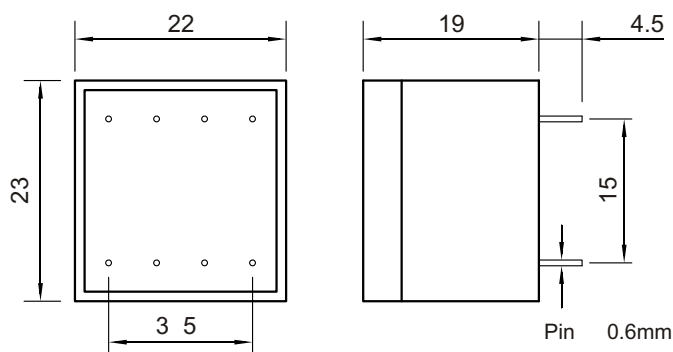

All dimensions in mm

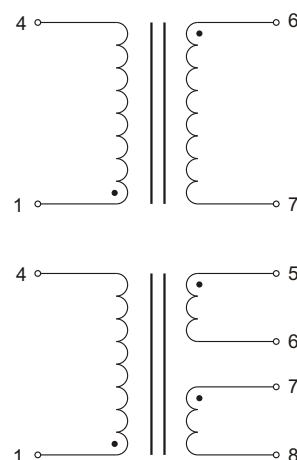


Fig 1

Fig 2