

# 50/60HZ PCB MOUNT TRANSFORMERS - EE RANGE

## 0.35W EE20-6.1 PE20 SERIES

### FEATURES:

It is miniaturised to be easily PCB mounted.  
 It has very high insulation of 4000Vrms Hi-pot.  
 It accords with UL94V-0 flammability req UI rements.  
 Heat-resistance reaches 130

### OPTIONS:

Packaging unit: 50 pieces  
 Bulk packaging is standard  
 Custom design available

### COMMON APPLICATIONS:

Medical eq Ulpments  
 Industrial eq Ulpments  
 Industrial controls  
 Test eq Ulpment  
 Industrial computers  
 Avionics & telecom


## ELECTRICAL CHARACTERISTICS (@ 25 )

MSN: bruce\_fu-vip@hotmail.com

Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.	Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.
PE200601	230	6 / 58.0	10.80	1	PE200613	115	6 / 58.0	10.80	1
PE200602	230	9 / 39.0	16.50	1	PE200614	115	9 / 39.0	16.50	1
PE200603	230	12 / 29.0	21.90	1	PE200615	115	12 / 29.0	21.90	1
PE200604	230	15 / 23.0	27.00	1	PE200616	115	15 / 23.0	27.00	1
PE200605	230	18 / 19.0	31.50	1	PE200617	115	18 / 19.0	31.50	1
PE200606	230	24 / 14.0	41.70	1	PE200618	115	24 / 14.0	41.70	1
PE200607	230	2 6 / 29.0	2 10.95	2	PE200619	115	2 6 / 29.0	2 10.95	2
PE200608	230	2 9 / 19.0	2 15.60	2	PE200620	115	2 9 / 19.0	2 15.60	2
PE200609	230	2 12 / 14.0	2 20.70	2	PE200621	115	2 12 / 14.0	2 20.70	2
PE200610	230	2 15 / 12.0	2 26.00	2	PE200622	115	2 15 / 12.0	2 26.00	2
PE200611	230	2 18 / 9.5	2 31.20	2	PE200623	115	2 18 / 9.5	2 31.20	2
PE200612	230	2 24 / 7.0	2 41.90	2	PE200624	115	2 24 / 7.0	2 41.90	2

Frequency 50/60Hz      Potted under vacuum  
 Split-bobbin            Temperature class to 70 /B  
 Short-circ UI t-proof      weight: 0.024kg

## PHYSICAL CHARACTERISTICS      TECHNICAL INFORMATION

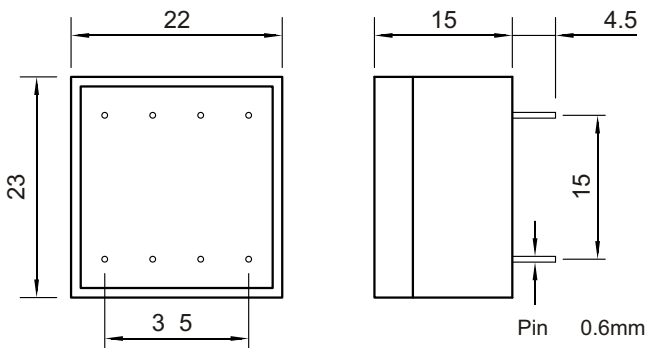

All dimensions in mm

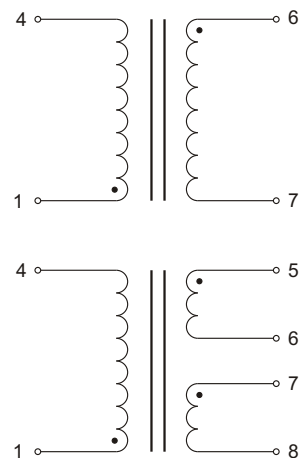


Fig 1

Fig 2