


50/60HZ PCB MOUNT TRANSFORMERS - EI RANGE

2W EI 30-15.5-PE3015 SERIES

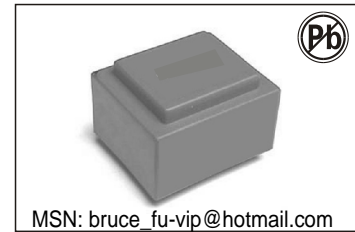

FEATURES:

Vacuum filling
Two compartments bobbins
Self-extinguishing plastics UL 94 V0
Degree of protection IP 00
100 grams weight

OPTIONS:

Bulk packaging is standard
Custom design available

COMMON APPLICATIONS:

Medical equipments Industrial equipments
Industrial controls Test equipment
Industrial computers Avionics & telecom

ELECTRICAL CHARACTERISTICS

MSN: bruce_fu-vip@hotmail.com




PRIMARY VOLTAGE: 230						PRIMARY VOLTAGE: 115					
Part Number	Secondary voltage V	Secondary Current mA	No-load voltage V	Ambient Temperature	Rating VA	Part Number	Secondary voltage V	Secondary Current mA	No-load voltage V	Ambient Temperature	Rating VA
PE301521	6	333	10.4	T70B	2	PE301533	6	333	10.4	T70B	2
PE301522	9	222	15.5	T70B	2	PE301534	9	222	15.5	T70B	2
PE301523	12	167	20.7	T70B	2	PE301535	12	167	20.7	T70B	2
PE301524	15	133	25.8	T70B	2	PE301536	15	133	25.8	T70B	2
PE301525	18	111	30.8	T70B	2	PE301537	18	111	30.8	T70B	2
PE301526	24	83	41.4	T70B	2	PE301538	24	83	41.4	T70B	2
PE301527	2 6	2 167	2 10.4	T70B	2	PE301539	2 6	2 167	2 10.4	T70B	2
PE301528	2 9	2 111	2 15.4	T70B	2	PE301540	2 9	2 111	2 15.4	T70B	2
PE301529	2 12	2 83	2 20.7	T70B	2	PE301541	2 12	2 83	2 20.7	T70B	2
PE301530	2 15	2 67	2 25.8	T70B	2	PE301542	2 15	2 67	2 25.8	T70B	2
PE301531*	2 18	2 56	2 30.8	T70B	2	PE301543	2 18	2 56	2 30.8	T70B	2
PE301532*	2 24	2 42	2 41.4	T70B	2	PE301544	2 24	2 42	2 41.4	T70B	2

* To be noted : 2 x 18 V and 2 x 24 non safety transformer approved, conform to EN 61558-2-6 (Isolating transformer).

TECHNICAL INFORMATION

PHYSICAL CHARACTERISTICS

Resin class B CEI 85 (20 000 h testing to CEI 126)
Inherently short-circuits proof transformer
30 V model is VDE EN 61558-2-6 certified (production on request)
Insulation voltage 4 KV
100% tested production
Certification : CCA procedure on request

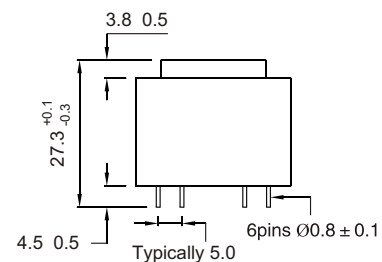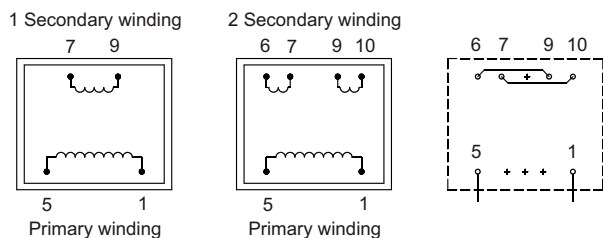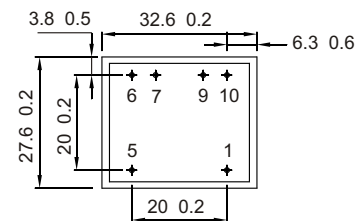

All dimensions in mm

Recommended Drill-hole Diameter for 1.3mm pins