

CBB19 金属化聚丙烯膜圆轴向电容器

CBB19 METALIZED PLOYPROPYLENE FILM ROUND AXES CAPACITOR

is constructed with metalized polyester film as medium and electricode, wrapped and sealed with flame- retardant plastic and epoxy resin, with high temperature-resistance, small volum, large capacity and good self-healing property.

Mainly used in instruments and the DC&AC ciruit of the household equipment and the fractional frequency of acoustics system.

●特点

以金属化聚脂膜作介质和电极,用阻燃胶带外包和环氧树脂灌封,具有电性能优良、可靠性好、耐高温、体积小、容量大和良好自愈性能。

●用途


本产品适用于仪器、仪表、家用电器的交直流电路,广泛应用于音响系统分频线路中。

●技术指标 (IEC384-16 GB10191-88 SJ/T10353-93)

1. 使用温度 (operating temperature): $-55^{\circ}\text{C}\sim+100^{\circ}\text{C}$
2. 容量范围 (capacitance range): $1\text{nF}\sim 15\mu\text{F}$
3. 允许偏差 (capacitance tolerance):J($\pm 5\%$) ; K ($\pm 10\%$)
4. 额定电压 (rated votage):250V 400V 630V 1000V 1250V (DC)
5. 耐电压 (withsland voltage):1.7V(R) 2S (1.5V(R) 5S)
6. 损耗角(dissipation factor):

$C\leq 0.1\mu\text{F}$	≤ 0.0015	10KHz
$0.1\mu\text{F}<C\leq 1\mu\text{F}$	≤ 0.0020	10KHz
$1\mu\text{F}<C\leq 4.7\mu\text{F}$	≤ 0.0015	1KHz
$C>4.7\mu\text{F}$	≤ 0.0015	1KHz
7. 绝缘电阻(insulation resistance):

$C\leq 0.33\mu\text{F}$	$\geq 50000\text{M}\Omega$;
$C>0.33\mu\text{F}$	$\geq 15000\text{S}$

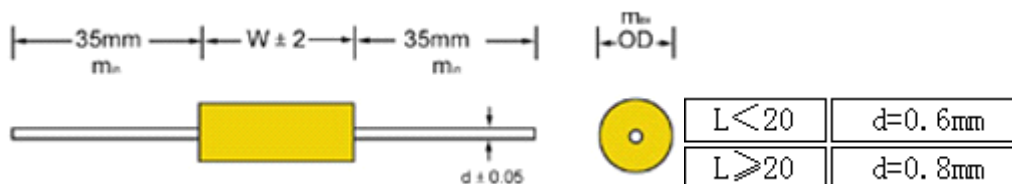

mm

陕西电子科技集团有限公司

SHAANXI ELECTRONIC GROUPTECH CO., LTD

Phone:+86 029-83135925 Mobile:15114839048 E-mail: sales@ferritewindings.com

CAP		250VDC		400VDC		630VDC		1000VDC		1250VDC	
CODE	μ F	L	OD	L	OD	L	OD	L	OD	L	OD
102	0.001									13	5.6
152	0.0015									13	5.6
222	0.0022									13	5.6
332	0.0033									13	5.8
472	0.0047							13	5.8	13	6.6
682	0.0068							13	6.6	15	7.1
								15	6.2	20	5.8
103	0.01							13	7.6	15	8.3
								15	7.2	20	6.6
153	0.015					13	5.6	15	8.4	20	7.6
								20	5.9		
223	0.022			13	5.6	13	6.5	20	7.6	20	8.7
						13	6				
333	0.033	13	5.6	13	5.9	15	6.9	20	8.9	20	10.2
				15	5.6	20	5.7	25	7.6	25	8.7
473	0.047	13	5.8	13	6.6	15	7.9	20	10.3	25	10.1
				15	6.3	20	6.3	25	8.7	28	9.3
683	0.068	13	6.6	15	7.3	20	7.2	25	10.2	28	10.9
		15	6.3	20	5.8	25	6.2	28	9.4	32	10
104	0.1	15	7.3	20	6.6	20	8.2	28	11.1	28	12.9
		20	5.9	25	5.8	25	7.1	32	10.3	32	11.9
						28	6.6				
154	0.15	15	8.5	20	7.6	20	9.6	32	12.1	32	14.1
		20	6.7	25	6.6	25	8.2	36	11.4	36	13.2
						28	7.7				
224	0.22	20	7.7	20	8.9	25	9.5	36	13.3	36	15.6
		25	6.6	25	7.6	28	8.9	46	11.4	46	13.6
				28	7.1						
334	0.33	20	9	25	8.9	25	11.3	36	15.9	46	16.2
		25	7.7	28	8.2	28	10.5	46	13.8	56	14.5

陕西电子科技集团有限公司

SHAANXI ELECTRONIC GROUPTECH CO., LTD

Phone:+86 029-83135925 Mobile:15114839048 E-mail: sales@ferritewindings.com

				32	7.6	32	9.6				
474	0.47	20	10.5	25	10.2	28	12.2	46	16.1	46	19
		25	8.8	28	9.5	32	11.2	56	14.5	56	17
		28	8.2	32	8.8	36	10.5				
684	0.68	25	10.3	28	11.2	32	13.1	46	19.1	56	20.2
		28	9.5	32	10.2	36	12.3	56	17.1		
		32	8.8	36	9.7						
105	1.0	25	12.2	32	12	32	15.5	56	20.4	56	24.1
		28	11.2	36	11.3	36	14.6				
		32	10.3	46	9.9	46	12.6				
155	1.5	28	13.4	32	14.4	36	17.5	56	24.7		
		32	12.3	36	13.4	46	15.1				
		36	11.5	46	11.8						
225	2.2	32	14.6	36	15.9	46	17.9				
		36	13.6	46	13.8	56	16				
		46	11.8	56	12.4						
335	3.3	36	16.3	46	16.5	46	21.5				
		46	14.1	56	14.9	56	19.2				
		56	12.7								
475	4.7	46	16.5	46	19.5	56	22.7				
		56	14.8	56	17.4						
685	6.8	46	19.6	46	23.1	56	26.9				
		56	17.5	56	20.6						
106	10	46	23.5	56	24.8						
		56	21								
156	15	56	25.4								

可根据客户需求定制(Special design for requirements)