



陕西电子科技集团有限公司
SHAANXI ELECTRONIC GROUPTECH CO., LTD
Phone:+86 029-83135925 Mobile:15114839048 E-mail: sales@ferritewindings.com



CBB60 型 交流 马达 电 容 器 TYPE CBB60 AC. MOTOR CAPACITOR

is constructed with Zn/Al metalized polypropylene film as medium and electricode, flame retardant plastic case enclosure and flame retardant resin endfil, With low dissipation factor, low in herent temperature rise, good capacitance stability, excellent softy and reliblity. Large used as a starding and running capacitor for 50/60HzAC, single phase motor.

●特点


以锌铝金属化聚丙烯膜作为介质和电极，塑料外壳，阻燃树脂灌封，具有损耗低、温升小、容量稳定、绝缘电阻高、良好的自愈性能和良好的安全性能。

●用途

本产品广泛应用于 50/60Hz 交流电源供电的单相电机的起动和运转。

●技术指标 (GB3367-97)

1. 使用温度(operating temperature): $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$
2. 额定电压(rated voltage): 250~500V (AC)
3. 容量范围(capacitance range): 2.0~10.0 μF
4. 允许偏差(capacitance tolerance): $\pm 5\%$ (J), $\pm 10\%$ (K)
5. 耐电压 (withsland voltage): 极间(line to line): 1.5V(R) 10S
极壳(line to ground): 2000V AC. 5S (金属外壳封装时)
6. 损耗角正切值 (dissipation factor) : $\text{tg } \delta \leq 0.001$ (20 $^{\circ}\text{C}$, 50Hz)
7. 绝缘电阻 (Insulation resistance) : $\geq 3000\text{S}$ (20 $^{\circ}\text{C}$, 1min)

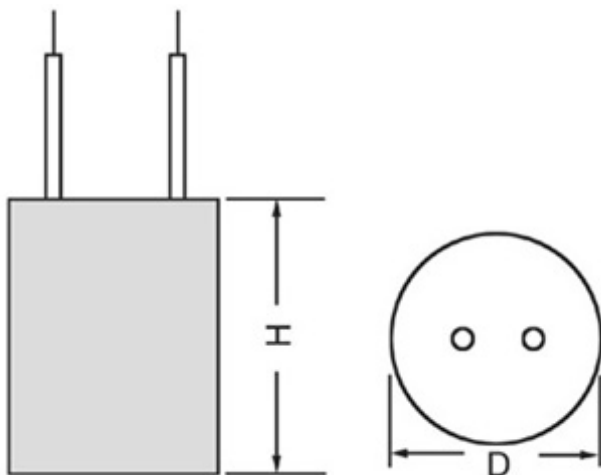

陕西电子科技集团有限公司

SHAANXI ELECTRONIC GROUPTECH CO., LTD

Phone:+86 029-83135925 Mobile:15114839048 E-mail: sales@ferritewindings.com

mm

容量(μF)\ 电压	250VAC		400\450VAC		500VAC	
	D	H	D	H	D	H
2	25	42	25	42	30	42
3	25	42	28	42	30	42
4	28	42	30	50	30	42
5	30	50	30	30	34	50
6	30	50	34	50	32	62
8	34	50	32	32	34	72
10	32	60	34	34	36	72

可根据客户需求定制(Special design for requirements)